
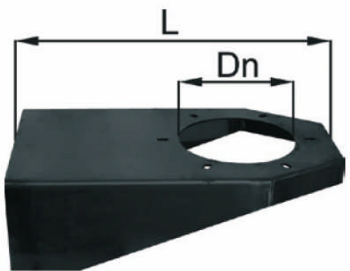


ACCESSOIRES POUR BRAS ARTICULES & BUSES DE CAPTATION



SUPPORT MURAL Pour bras articulés

	Type	REF article	d(mm)	L(mm)	B(mm)
	WBN-125	817W13	125	300	140
	WBN-160	817W14	160	360	140
	WBN-200	817W15	200	420	140
	WBN-250	817W16	250	480	140
WBN-315	817W17	315	540	140	


BRIDES DE FIXATION avec virole : Pour liaison à un conduit

	Type	REF article	Diamètre (mm)	Pour adapter sur modèles
	DC-125	830Z13	125	ERGO-M, ERGO-K
	DC-160	830Z14	160	ERGO-L, RO-L
	DC-200	830Z15	200	ERGO-D, RO-D
	DC-250	830Z20	250	—
DC-315	830Z18	315	—	

BUSES CIRCULAIRES Pour bras articulés


BUSES ALUMINIUM	Type	REF article	d(mm)	D(mm)	Poids (kgs)
	MSO	810H36	100	245	0.30
	KSO	810H37	125	245	0.40
	LSO	810H38	160	300	0.54
	LSO/500	810H44	160	500	0.62
	DSO	810H39	200	300	0.71
	LLO	810H40	160	300	0.72
	DLO	810H41	200	300	0.81

BUSES D'ASPIRATION MAGNETIQUE : Pour aspiration via conduit souple


	Type	REF article	Diamètre (mm)
	SM-125	818S01	125
	SM-160	818S02	160
SM-200	818S03	200	

BRAS ROTATIF

Model X

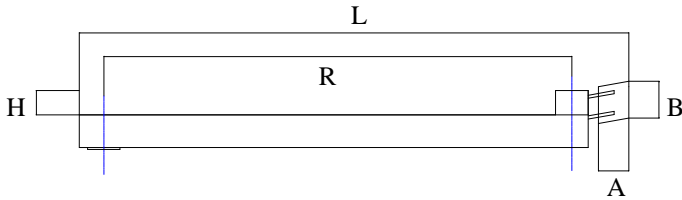

Model Y

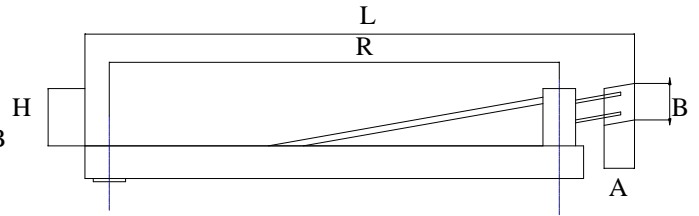

REFERENCE	TYPE	Diamètre Dn (mm)	Moment Maximum [Nm]	Poids (kg)	B(mm)	R(mm)	L(mm)	H(mm)
811R16	RO-1.5-E-L/X	160	1400	46	180	2300	1990	280
811R17	RO-2.5-E-L/X		1700	51	550	3500	2520	780
811R22	RO-4-E-L/X		3100	84	680	5700	3850	850
811R21	RO-2.5-E-L/Y		4400	68	450	2300	2460	625
811R23	RO-4-E-L/Y		6400	98	550	3500	3710	780

COURBE DE PERFORMANCE DES BRAS ROTATIFS

