


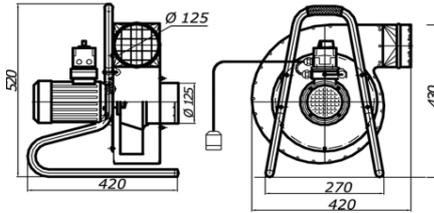




### WPA- 3 -P





### WPA- 5 -P

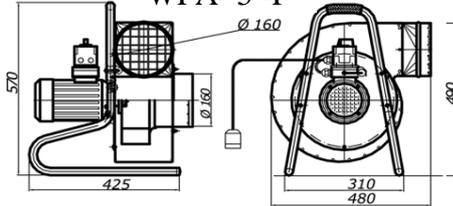

### WPA- 7 -P

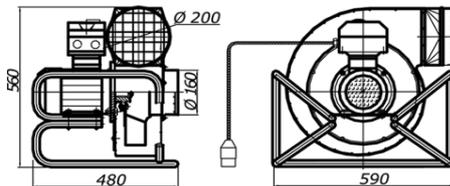

### WPA- 8 -P

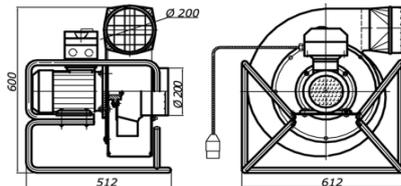

Type	Référence	Voltage	Vitesse (tr/min)	Puissance	Intensité	Pression sonore		Masse (Kg)
						Distance		
						1 m	5 m	
WPA - 3 - P	805W90	230	3000	0.37	3.0	73	67	17.5
WPA - 5 - P	805W91	230		0.55	3.6	76	71	24
WPA - 5 - P	805W92	3x400		0.55	1.35	76	71	
WPA - 7 - P	805W95	230		1.1	7.9	86	78	31
WPA - 7 - P	805W96	3x400		1.1	2.57	86	78	
WPA - 8 - P	805W97	3x400		1.5	3.76	87	81	35

### Les flexibles :

	Modèle	Diamètre	Température	Construction
	ST-125	125	60°	PVC avec spire acier
	ST-160	160	60°	
	ST-200	200	60°	